


**SPITFIRE™**

# MA6721\*\*-220 Ceiling Fan

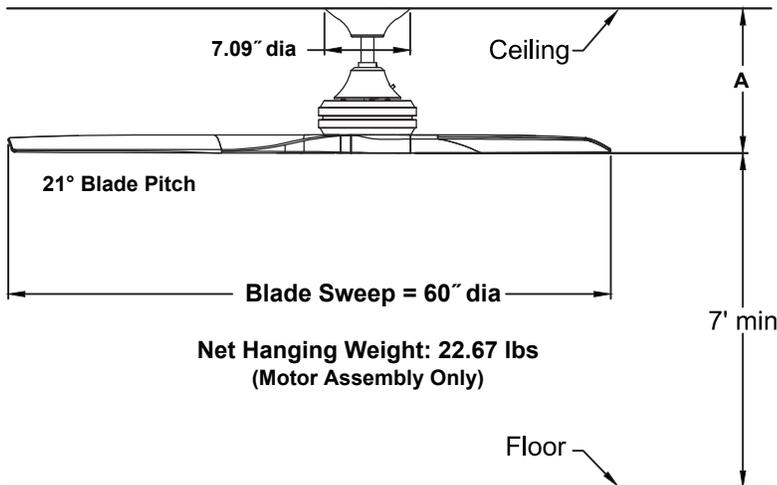

	<b>A</b>
Fan w/4.5" downrod	12.00"
Fan w/12" downrod	19.50"
Fan w/18" downrod	25.50"
Fan w/24" downrod	31.50"
Fan w/36" downrod	43.50"
Fan w/48" downrod	55.50"
Fan w/60" downrod	67.50"
Fan w/72" downrod	79.50"

<b>Available Finishes</b>	
BN	Brushed Nickel
DZ	Dark Bronze
GR	Matte Greige

### INSTALLATION REQUIREMENTS:

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 35 lbs.

### ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 220~240 volts AC, 50 Hz, 5 amp circuit.

### MOTOR SPECS:

188 x 25-220 AC motor is designed for optimal performance with this fan.

### BLADE SET:

3 bladed blade sets are available in wood material — all sold separately. See our catalog or visit [www.fanimation.com](http://www.fanimation.com) for blade options.

### LIGHTING OPTIONS:

LK6721-220 – One 18-watt dimmable LED — sold separately.

### CONTROL OPTIONS:

CW6721WH-220 wall control is included. This wall control has 3 fan speeds switch and light toggle switch. The reverse switch is located on the top housing. Optional BTZR9-220 and CRL4WH-220 hand-held remote controls with receiver units are available—sold separately. Instructions are provided with each control.

### DOWNROD OPTIONS:

Fan comes with 1" dia. x 4.5" long downrod (DR1-45). Optional downrods available in 12", 18", 24", 36", 48", 60", and 72" lengths. A downrod coupler is available for installations requiring a downrod longer than 72". Fan can be mounted on a sloped ceiling up to 19°. Most sloped ceiling installations require a downrod longer than the standard 4.5" downrod. Call technical support for more information.

### LOCATION USE:

Fan is rated for dry and damp locations (IP20).

<b>Fan Airflow / Energy Efficiency Info (220V)</b>					
Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High	140	6774	127	0.22	53
Med	103	5089	154	0.17	33
Low	55	2777	219	0.11	13